

2025-2026

PRODUCT CATALOGUE

COMMERCIAL LIGHTING



TREPOWER

COMPANY PROFILE

Jiaxing Trepower Co., Ltd is affiliated to Trepower Group, is located in Jiaxing city, Zhejiang province, besides Shanghai area in East China. Each year, we export more than 2 million pieces of lighting products, covering commercial lighting products and household lighting products.

The group company owns one trade company, and two production factories. One factory locates in Jiaxing city, produces commercial lighting products, covering led panel lamp, led batten lamp, led down light, led spot light, led tri-proof lamp, led linear light, led flood light, and led growth lamp. The other factory locates in Zhongshan city, produce household lighting products, covering chandelier, table lamp, floor standing lamp, wall lamp, led ceiling lamp, soft led linear lighting, and decorative antler lamps.

We serve more than 50 big and middle companies located in the country of United States, Canada, France, Italy, Germany, Holland, Poland, Czech, Romania, Moldova, Brazil, Thailand, Indonesia.

We provide OEM and ODM to customers through our organization.

Our services to our clients including:

- design and new product development
- bulk order production and producing tracing
- technical expertise and quality assurance

We pay attention to product quality management. We have a team of trained person who takes charge in the quality control. To all the orders before shipment, the team carry out self-inspection procedure against AQL level 1.0, 1.5, 2.5 and 4.0.

[illegible]

PHOTO INDEX

PANEL LIGHT 08-41



PLS-E
9



PLS-SE
10



PLS-SB
11




PLR
12



PSR-E
13



PSR-B
14



PLE
15



PSE
16



PLB
17



PHE
18



PSB
19




PSS-B
20



PSS-SB
21



PLN-E65
22



PLN-B65
23



PLE24/PLB24
24




PEM
25



PLB-XP
26



PMM
27




PLM
28



PSL
29



PLZ
30



PSC
31




PMC
32



PTC
33



PSK
34



PLF-KA
35



PLF-KB
36



PLF-KC
37



PLF-KD
38

PHOTO INDEX



PLF-KE
39



PLF-KS
40



LED Panel Accessory
41

DOWN LIGHT 42-58



DLR-01R
43



DLR-01S
43



DLR-02
44



DLR-02TL
44



DLR-03P
45




DLR-03C
45



DLR-04R
46



DLR-04S
46



DLR-05
47



DLR-06
47



DLR-07
48



DLR-08
48



DLR-09
49




DLR-10
49



DLR-11
50



DLR-12
50




DLS-01R
51




DLS-01S
51




DLS-02
52



DLS-03
52



DLS-04
53



DLS-05
53



DLS-06
54



DLS-07
54

PHOTO INDEX



DLT-01
55



DLT-02
55



DLT-03
56



DLT-04
56



DLT-05
57



DLT-06
57



DLT-07
58



DMT-01
58

BATTEN LIGHT 59-69



BT-M1
60



BT-M1-CCT
61



BT-M2
62



BT-M3
63



BT-M4
64



BL40-P1
65



BL40-P1-CCT
66



BL65-P1
67



BTR65-ES
68



BTR65-ED
69

PHOTO INDEX

CEILING LIGHT 70-82



CP25
71



CM50
72



CM50-DIM
73



CM50-HW
74



CM50-HW-DIM
75



CL-60
76



CL-60-MW
77



CL-80
78



CU80
79



CU90
80



CU90-DIM
81



CW90
82



LED PANEL LIGHT

Little Panel Light PLS-E, Aluminum

TREPOWER



IP 40



120°



CRI>80



Non-Dimmable



Warranty



No Flicker



50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLS-R120-E	6W	AC220-240V	R120x12mm	360LM	>80	>0.5	3years
PLS-R150-E	9W	AC220-240V	R145x12mm	650LM	>80	>0.9	3years
PLS-R170-E	12W	AC220-240V	R170x12mm	950LM	>80	>0.9	3years
PLS-R225-E	18W	AC220-240V	R225x12mm	1520LM	>80	>0.9	3years
PLS-R300-E	24W	AC220-240V	R300x12mm	2160LM	>80	>0.9	3years
PLS-120X120-E	6W	AC220-240V	120x120mm	360LM	>80	>0.5	3years
PLS-150X150-E	9W	AC220-240V	147x147mm	650LM	>80	>0.9	3years
PLS-170X170-E	12W	AC220-240V	170x170mm	950LM	>80	>0.9	3years
PLS--225X225-E	18W	AC220-240V	225x225mm	1520LM	>80	>0.9	3years
PLS-300X300-E	24W	AC220-240V	300x300mm	2160LM	>80	>0.9	3years

Little Panel Light

PLS-SE, Surface Mounting



IP 40



120°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLS-R120-SE	6W	AC220-240V	R120x36mm	360LM	>80	>0.5	3years
PLS-R170-SE	12W	AC220-240V	R170x36mm	950LM	>80	>0.9	3years
PLS-R225-SE	18W	AC220-240V	R225x36mm	1520LM	>80	>0.9	3years
PLS-R300-SE	24W	AC220-240V	R300x36mm	2160LM	>80	>0.9	3years
PLS-120X120-SE	6W	AC220-240V	120x120x36mm	360LM	>80	>0.5	3years
PLS-170X170-SE	12W	AC220-240V	170x170x36mm	950LM	>80	>0.9	3years
PLS-225X225-SE	18W	AC220-240V	225x225x36mm	1520LM	>80	>0.9	3years
PLS-300X300-SE	24W	AC220-240V	300x300x36mm	2160LM	>80	>0.9	3years

Little Panel Light

PLS-SB, Plastic



IP 40



120°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Plastic frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Efficacy	Ra	PF	Warranty
PLS-R150-SB	9W	100~265Vac	R145x32mm	70-80lm/w	>80	>0.5	3years
PLS-R170-SB	12W	100~265Vac	R170x32mm	70-80lm/w	>80	>0.5	3years
PLS-R225-SB	18W	100~265Vac	R225x32mm	70-80lm/w	>80	>0.5	3years
PLS-R300-SB	24W	100~265Vac	R300x32mm	70-80lm/w	>80	>0.5	3years
PLS-150X150-SB	9W	100~265Vac	145x145x32mm	70-80lm/w	>80	>0.5	3years
PLS-170X170-SB	12W	100~265Vac	170x170x32mm	70-80lm/w	>80	>0.5	3years
PLS-225X225-SB	18W	100~265Vac	225x225x32mm	70-80lm/w	>80	>0.5	3years
PLS-300X300-SB	24W	100~265Vac	300x300x32mm	70-80lm/w	>80	>0.5	3years

Round Slim Panel PLR, Aluminum



IP 40



120°



CRI80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Efficacy	Ra	PF	Warranty
PLR-30	24W	AC220-240V	R300x12mm	80Lm/w	80	>0.9	5years
PLR-40	36W	AC220-240V	R400x12mm	80Lm/w	80	>0.9	5years
PLR-50	40W	AC220-240V	R500x12mm	80Lm/w	80	>0.9	5years
PLR-60	48W	AC220-240V	R600x12mm	80Lm/w	80	>0.9	5years

Round Panel(Edge-lit) PSR-E, Surface Mounting



IP 40



120°



CRI80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Efficacy	Ra	PF	Warranty
PSR-E-30	24W	AC220-240V	R300x50mm	80Lm/w	80	>0.9	5years
PSR-E-40	36W	AC220-240V	R400x50mm	80Lm/w	80	>0.9	5years
PSR-E-50	40W	AC220-240V	R500x50mm	80Lm/w	80	>0.9	5years
PSR-E-60	48W	AC220-240V	R600x50mm	80Lm/w	80	>0.9	5years

Round Panel(Back-lit) PSR-B, Surface Mounting



IP 40



120°



CRI80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Efficacy	Ra	PF	Warranty
PSR-B-30	24W	AC220-240V	R300x50mm	100Lm/w	80	>0.9	5years
PSR-B-40	32W	AC220-240V	R400x50mm	100Lm/w	80	>0.9	5years
PSR-B-50	40W	AC220-240V	R500x50mm	100Lm/w	80	>0.9	5years
PSR-B-60	50W	AC220-240V	R600x50mm	100Lm/w	80	>0.9	5years

Slim Panel(Edge-lit) PLE

TREPOWER



IP 40



90°/120°



CRI80/90



Non-Dimmable



Warranty



No Flicker




50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- UGR22,UGR19,UGR16 for option
- High light efficiency
- Energy saving

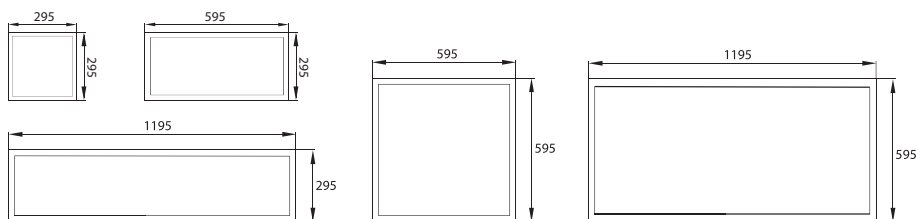

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLE-3030	18W	AC220-240V	295x295x9mm	1800LM	80/90	>0.9	5years
PLE-3060	28W	AC220-240V	295x595x9mm	2800LM	80/90	>0.9	5years
PLE-3012	40W	AC220-240V	295x1195x9mm	4000LM	80/90	>0.9	5years
PLE-6060	40W	AC220-240V	595x595x9mm	4000LM	80/90	>0.9	5years
PLE-6012	60W	AC220-240V	595x1195x9mm	6000LM	80/90	>0.9	5years

Slim Panel(Edge-lit) PSE, Surface Mounting



IP 40



90°/120°



CRI80/90



Non-Dimmmble



Warranty



No Flicker




50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- UGR22,UGR19,UGR16 for option
- High light efficiency
- Energy saving

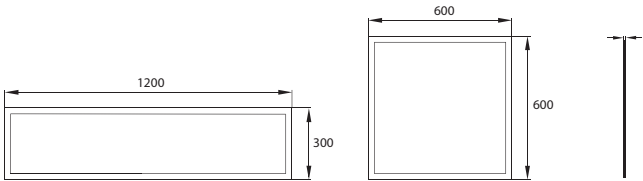

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PSE-3012	40W	AC220-240V	300x1200x40mm	4000LM	80/90	>0.9	5years
PSE-6060	40W	AC220-240V	600x600x40mm	4000LM	80/90	>0.9	5years

Back-lit Panel PLB

TREPOWER



IP 40



90°/120°



CRI80/90



Non-Dimmable



Warranty



No Flicker





50000h



≥15000

- Aluminum frame / steel frame
- 3000K,4000K,6000K for option
- UGR22,UGR19,UGR16 for option
- High light efficiency(100lm/w, 120lm/w)
- Energy saving




Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLB-3030	18W	AC220-240V	295x295x28mm	1800LM	80/90	>0.9	5years
PLB-3060	28W	AC220-240V	295x595x28mm	2800LM	80/90	>0.9	5years
PLB-3012	40W	AC220-240V	295x1195x28mm	4000LM	80/90	>0.9	5years
PLB-6060	40W	AC220-240V	595x595x28mm	4000LM	80/90	>0.9	5years
PLB-60120	60W	AC220-240V	595x1195x28mm	6000LM	80/90	>0.9	5years

Back-lit Panel PHE, 150lm/w, 180lm/w

TREPOWER



- Aluminum frame
- 3000K,4000K,6000K for option
- UGR22,UGR19,UGR16 for option
- High light efficiency(150lm/w, 180lm/w)
- Energy saving



IP 40



90°/120°



CRI80/90



Non-Dimmable



Warranty



No Flicker



50000h



≥15000

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PHE-150	26W	AC220-240V	595x595x32mm	4000LM	80	>0.9	5years
PHE-180	20W	AC220-240V	595x595x32mm	3600LM	80	>0.9	5years

Back-lit Panel

PSB-M(metal), PSB-P(plastic)

Surface Mounting



IP 40



90°/120°



CRI80/90



Non-Dimmble



Warranty



No Flicker




50000h



≥15000




- Aluminum frame
- 3000K,4000K,6000K for option
- UGR22,UGR19,UGR16 for option
- High light efficiency(100lm/w, 120lm/w, 150lm/w, 180lm/w)
- Energy saving

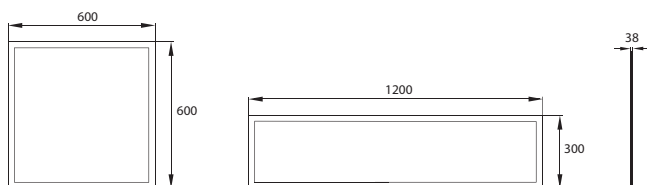

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PSB-M-30x120	40W	AC220-240V	300x1200x38mm	4000LM	80/90	>0.9	5years
PSB-M-60x60	40W	AC220-240V	600x600x38mm	4000LM	80/90	>0.9	5years
PSB-P-30x120	40W	AC220-240V	300x1200x38mm	4000LM	80/90	>0.9	5years
PSB-P-60x60	40W	AC220-240V	600x600x38mm	4000LM	80/90	>0.9	5years

Frameless Panel Light PSS-B, Recessed

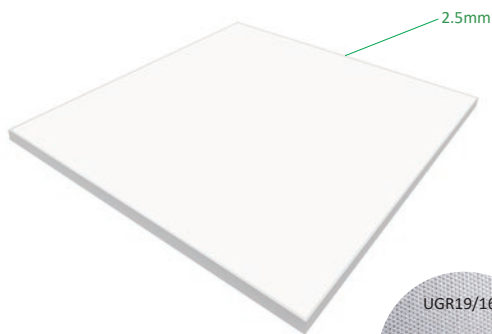

IP 40



120°



CRI>80



Non-Dimmable



Warranty



No Flicker




50000h




≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- UGR22,UGR19,UGR16 for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PSS-B	40W	AC220-240V	597x597x38mm	4000LM	>80	>0.9	5years

Frameless Panel Light PSS-SB, Surface Mounting

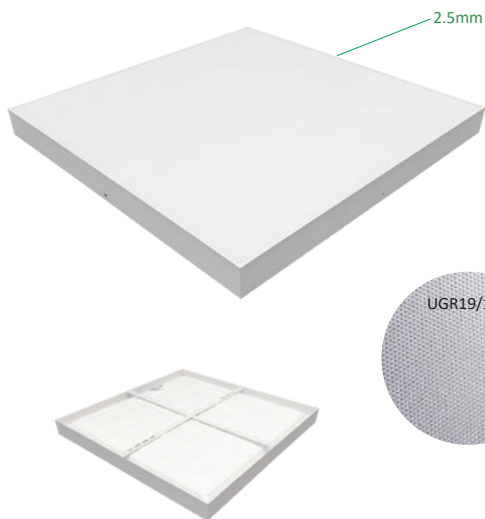

IP 40



120°



CRI>80



Non-Dimmable



Warranty



No Flicker




50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- UGR22,UGR19,UGR16 for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PSS-SB	40W	AC220-240V	600x600x52mm	4000LM	>80	>0.9	5years

LED Panel Light(Edge-lit) PLN-E65, IP65

TREPOWER



IP 65



90°/120°



CRI>80



Non-Dimmable



Warranty



No Flicker





50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- IP65 waterproof
- High light efficiency 100lm/w 120lm/w
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLN-E65-3030	24W	AC220-240V	295x295x11mm	2400LM	>80	>0.9	5years
PLN-E65-3060	32W	AC220-240V	295x595x11mm	3200LM	>80	>0.9	5years
PLN-E65-6060	40W	AC220-240V	595x595x11mm	4000LM	>80	>0.9	5years
PLN-E65-3012	40W	AC220-240V	295x1195x11mm	4000LM	>80	>0.9	5years
PLN-E65-6012	60W	AC220-240V	595x1195x11mm	6000LM	>80	>0.9	5years

LED Panel Light(Back-lit) PLN-B65, IP65

TREPOWER



IP 65



90°/120°



CRI>80



Non-Dimmable



Warranty



No Flicker





50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- IP65 waterproof
- High light efficiency(100lm/w, 120lm/w, 150lm/w, 180lm/w)
- UGR19, UGR22 for option
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLN-B65-3030	18W	AC220-240V	295x295x32mm	1800LM	>80	>0.9	5years
PLN-B65-3060	28W	AC220-240V	295x1195x32mm	2800LM	>80	>0.9	5years
PLN-B65-6060	40W	AC220-240V	595x595x32mm	4000LM	>80	>0.9	5years
PLN-B65-3012	40W	AC220-240V	295x1195x32mm	4000LM	>80	>0.9	5years
PLN-B65-6012	60W	AC220-240V	595x1195x32mm	6000LM	>80	>0.9	5years

LED Panel Light

PLE24, PLB24, 24h lighting

TREPOWER



IP 40



90°/120°



CRI80



Non-Dimmable



Warranty



No Flicker




50000h




≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- UGR22,UGR19,UGR16 for option
- 24hour lighting
- High light efficiency
- Energy saving

slim panel



back-lit panel



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLE24-60X60-40W	40W	AC220-240V	595x595x11mm	4000LM	>80	>0.9	3years
PLB24-60X60-40W	40W	AC220-240V	595x595x32mm	4000LM	>80	>0.9	3years

LED Panel Light PEM, Emergency



IP 40



90°/120°



CRI80



Non-Dimmable



Warranty



No Flicker





50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- UGR22,UGR19,UGR16 for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PEM-6060	40W	AC220-240V	595x595x32mm	4000LM	80	>0.9	5years
PEM-3012	40W	AC220-240V	595x1195x32mm	4000LM	80	>0.9	5years

LED Panel Light PLB-XP, Microwave sensor

TREPOWER



IP 40



120°



CRI80



Non-Dimmable



Warranty



No Flicker




50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- Microwave sensor
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLB-XP	40W	AC220-240V	595x595x32mm	4000LM	80	>0.9	3years

LED Panel Light(Back-lit) PMM



IP 40



120°



CRI>80



Non-Dimmable



Warranty



No Flicker




50000h



≥15000


- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- UGR16
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PMM-6060-36	36W	AC220-240V	595x595x32mm	2880LM	>80	>0.9	5years
PMM-6060-96	96W	AC220-240V	595x595x32mm	9000LM	>80	>0.5	3years

LED Panel Light PLM

TREPOWER

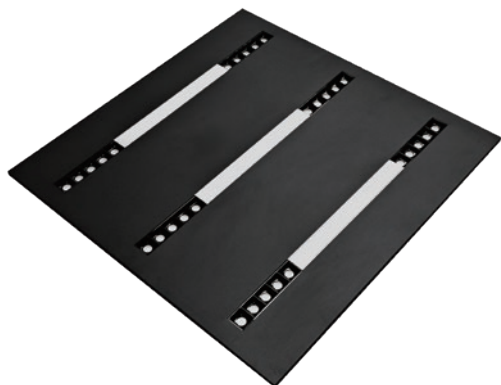

IP 40



120°



CRI>80



Non-Dimmble



Warranty



No Flicker




50000h



≥15000


- Iron frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLM-6060-3L	48W	AC220-240V	595x595x32mm	4000LM	>80	>0.5	3years
PLM-6060-3L	36W	AC220-240V	595x595x32mm	6000LM	>80	>0.9	5years

LED Panel Light PSL

TREPOWER

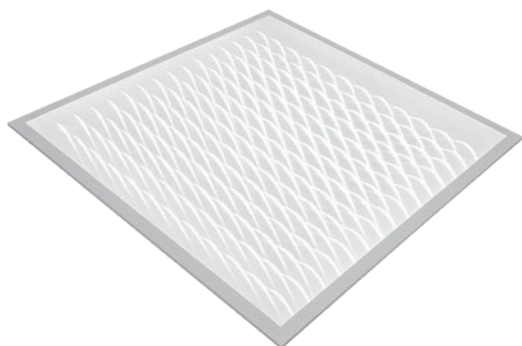

IP 40



120°



CRI>80



Non-Dimmble



Warranty



No Flicker




50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PSL-6060-40W	40W	AC220-240V	595x595x32mm	3200LM	>80	>0.9	5years
PSL-6060-96W	96W	AC220-240V	595x595x32mm	8000LM	>80	>0.5	3years

LED Panel Light PLZ

TREPOWER



IP 40



120°



CRI>80



Non-Dimmble



Warranty



No Flicker




50000h



≥15000


- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLZ-6060-4L-36W	36W	AC220-240V	595x595x32mm	3600LM	>80	>0.9	5years
PLZ-6060-4L-96W	96W	AC220-240V	595x595x32mm	9600LM	>80	>0.5	3years

LED Panel Light PSC, R/G/B Single Color

TREPOWER

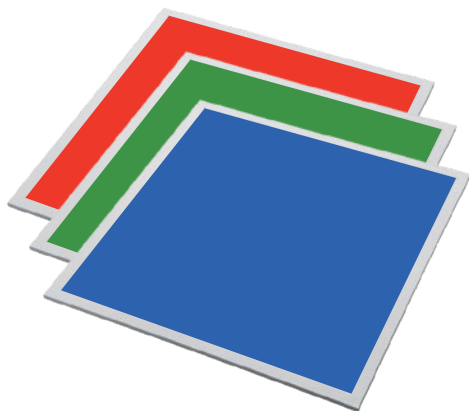

IP 40



120°



CRI>80



Non-Dimmable



Warranty



No Flicker




50000h




≥15000

- Aluminum frame
- High light efficiency
- Energy saving

slim panel

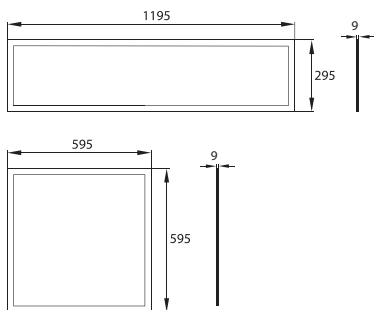

back-lit panel

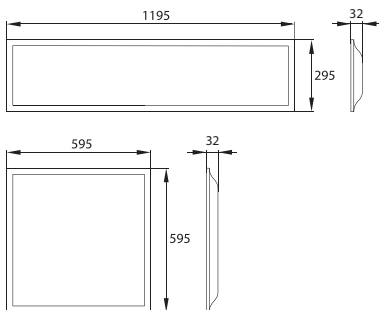

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PSC-60x60-E-RGB	40W	AC220-240V	595x595x9mm	4000LM	>80	>0.9	5years
PSC-30x120-E-RGB	40W	AC220-240V	295x1195x9mm	4000LM	>80	>0.9	5years
PSC-60x60-B-RGB	40W	AC220-240V	595x595x32mm	4000LM	>80	>0.9	5years
PSC-30x120-B-RGB	40W	AC220-240V	295x1195x32mm	4000LM	>80	>0.9	5years

LED Panel Light PMC, RGBW

TREPOWER



IP 40



120°



CRI>80



Dimmable



Warranty



No Flicker




50000h



≥15000

- Aluminum frame
- Can be controlled by phone app: TUYA APP and Google home
- with remote control for easy use
- High light efficiency
- Energy saving

back-lit panel

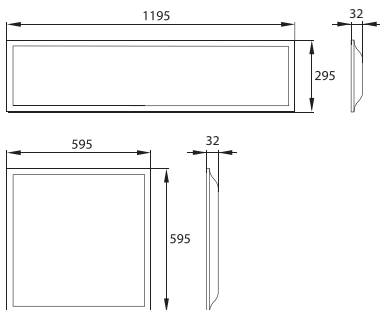

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PMC-60X60-B	40W	AC220-240V	595x595x32mm	4000LM	>80	>0.9	5years
PMC-30X120-B	40W	AC220-240V	295x1195x32mm	4000LM	>80	>0.9	5years

LED Panel Light PTC, Tunable CCT

TREPOWER



IP 40



120°



CRI>80



Dimmable



Warranty



No Flicker




50000h




≥15000

- Aluminum frame
- Can be controlled by phone app: TUYA APP and Google home
- with remote control for easy use
- High light efficiency
- Energy saving

slim panel

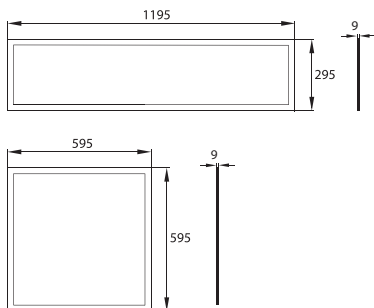

back-lit panel

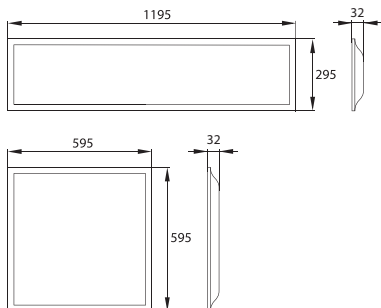

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PTC-E-6060	40W	AC220-240V	595x595x9mm	4000LM	>80	>0.9	5years
PTC-E-3012	40W	AC220-240V	295x1195x9mm	4000LM	>80	>0.9	5years
PTC-B-6060	40W	AC220-240V	595x595x32mm	4000LM	>80	>0.9	5years
PTC-B-3012	40W	AC220-240V	295x1195x32mm	4000LM	>80	>0.9	5years

LED Panel Light PSK, Blue Sky Panel

TREPOWER



IP 40



120°



CRI80



Non-Dimmable



Warranty



No Flicker




50000h



≥15000

- Iron frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PSK-6060	40W	AC220-240V	595x595x32mm	3200LM	80	>0.9	5years
PSK-6060	60W	AC220-240V	595x595x32mm	4800LM	80	>0.9	5years

Frame Light PLF-KA



IP 40



120°



CRI>80



Non-Dimmble



Warranty



No Flicker




50000h



≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLF-KA	40W	AC220-240V	591x591x11mm	4000LM	>80	>0.9	5years

Frame Light PLF-KB, Round



IP 40



120°



CRI>80



Non-Dimmble



Warranty



No Flicker




50000h




≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLF-KB	40W	AC220-240V	R591x15mm	3200LM	>80	>0.9	5years

Frame Light PLF-KC

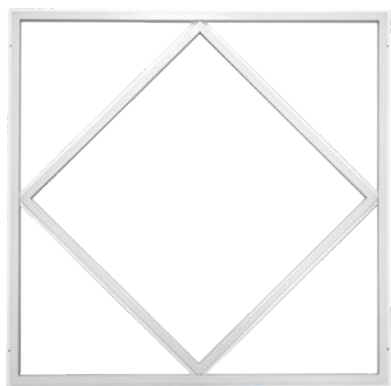

IP 40



120°



CRI>80



Non-Dimmable



Warranty



No Flicker




50000h




≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLF-KC	72W	AC220-240V	591x591x11mm	7200LM	>80	>0.9	5years

Frame Light PLF-KD

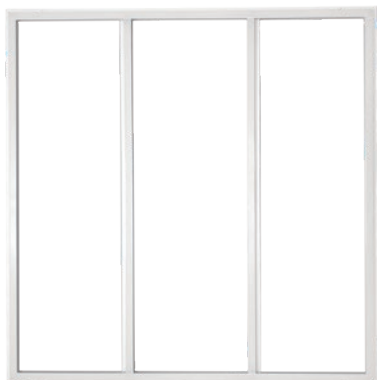

IP 40



120°



CRI>80



Non-Dimmble



Warranty



No Flicker




50000h




≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving



Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLF-KD	72W	AC220-240V	591x591x11mm	7200LM	>80	>0.9	5years

Frame Light PLF-KE

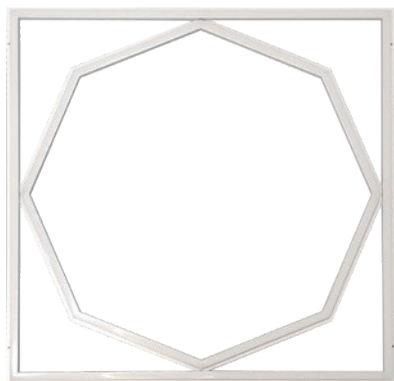

IP 40



120°



CRI>80



Non-Dimmable



Warranty



No Flicker




50000h




≥15000

- Aluminum frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving




Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLF-KE	72W	AC220-240V	591x591x11mm	7200LM	>80	>0.9	5years

Frame Light PLF-KS, Plastic

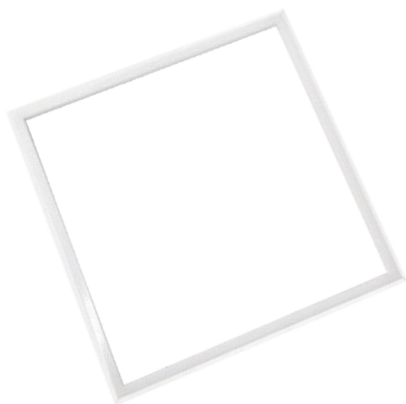

- Plastic frame
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving



IP 40



120°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
PLF-KS-6060	50W	AC220-240V	595x595x15mm	5000LM	>80	>0.9	3years
PLF-KS-3060	26W	AC220-240V	595x295x15mm	3000LM	>80	>0.9	3years

Screwless-Surface frame

RNT-43, 43mm high, white/black




Screwless-Surface frame

RNT-68, 68mm high, white/black



Surface frame kit

RNT-50, 50mm high, white/black

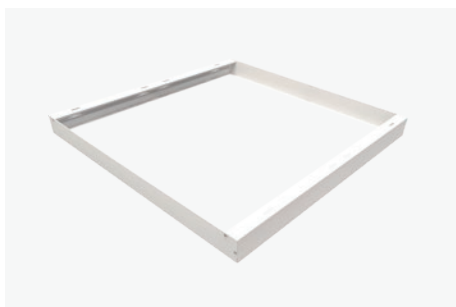

Accessory Screw Kit

RNA-4, RNA-6



Steel Wires Suspension Kit


RNS-S1, 1m long/2m long/3m long



Steel Wires Suspension Kit

RNS-M1, 1m long/2m long/3m long



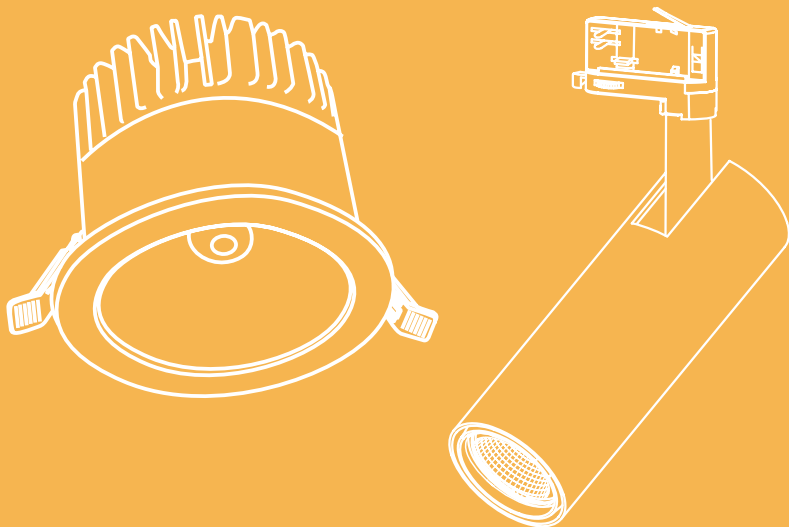

LED DOWN LIGHT

Recessed LED Down Light

DLR-01

TREPOWER



- aluminum alloy
- 3000K,4000K,6500K for option
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-01R	5W	Φ100*35mm	70-80mm	120°	60lm/w	>0.5
	9W	Φ120*35mm	90-110mm	120°	70lm/w	>0.5
	12W	Φ145*35mm	120-130mm	120°	80lm/w	>0.9
	18W	Φ180*35mm	150-165mm	120°	80lm/w	>0.9
	24W	Φ225*35mm	190-210mm	120°	80lm/w	>0.9



- aluminum alloy
- 3000K,4000K,6500K for option
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-01S	5W	86*86*36mm	75*75mm	120°	60lm/w	>0.5
	9W	120*120*36mm	105*105mm	120°	70lm/w	>0.5
	12W	150*150*36mm	135*135mm	120°	80lm/w	>0.9
	18W	170*170*36mm	155*155mm	120°	80lm/w	>0.9
	24W	225*225*36mm	205*205mm	120°	80lm/w	>0.9

Recessed LED Down Light

DLR-02

TREPOWER



- aluminum alloy
- 3000K,4000K,6500K for option
- Adjustable angle
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-02	5W	Φ42xH65mm	35mm	24°	50lm/w	>0.5
	7W	Φ52xH66mm	35mm	24°	60lm/w	>0.5
	8W	Φ62xH72mm	35mm	15°	60lm/w	>0.9
	9W	Φ72xH76mm	35mm	10°	65lm/w	>0.9
	13W	Φ82xH86mm	35mm	10°	65lm/w	>0.9



- aluminum alloy
- 3000K,4000K,6500K for option
- Adjustable angle
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-02TL	5W	Φ65xH65mm	35mm	36°	50lm/w	>0.5
	7W	Φ75xH66mm	35mm	36°	60lm/w	>0.5
	8W	Φ85xH72mm	35mm	55°	60lm/w	>0.9
	9W	Φ95xH76mm	35mm	55°	65lm/w	>0.9
	13W	Φ105xH86mm	35mm	55°	65lm/w	>0.9

Recessed LED Down Light

DLR-03

TREPOWER



- aluminum allory
- 3000K,4000K,6500K for option
- Adjustable angle
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-03P-1L	13W	85*85mm	80*80mm	36°	65lm/w	>0.9
DLR-03P-2L	26W	157*85mm	150*80mm	36°	65lm/w	>0.9
DLR-03P-3L	39W	230*85mm	220*80mm	36°	65lm/w	>0.9



- aluminum allory
- 3000K,4000K,6500K for option
- Adjustable angle
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-03C-1L	13W	85*85mm	80*80mm	36°	65lm/w	>0.9
DLR-03C-2L	26W	157*85mm	150*80mm	36°	65lm/w	>0.9
DLR-03C-3L	39W	230*85mm	220*80mm	36°	65lm/w	>0.9

Recessed LED Down Light

DLR-04

TREPOWER



- aluminum alloy
- 3000K,4000K,6500K for option
- Adjustable angle
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-04R	7W	Ø85*H68mm	75mm	24°/36°/60°	80lm/w	>0.5
	12W	Ø100*H88mm	85mm	24°/36°/60°	80lm/w	>0.5
	20W	Ø140*H102mm	125mm	24°/36°/60°	80lm/w	>0.5
	30W	Ø175*H116mm	150mm	24°/36°/60°	80lm/w	>0.5



- aluminum alloy
- 3000K,4000K,6500K for option
- Adjustable angle
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-04S	7W	85*85*H68mm	75mm	24°/36°/60°	80lm/w	>0.5
	12W	100*100*H88mm	85mm	24°/36°/60°	80lm/w	>0.5
	20W	140*140*H102mm	115mm	24°/36°/60°	80lm/w	>0.5
	30W	175*175*H116mm	140mm	24°/36°/60°	80lm/w	>0.5

Recessed LED Down Light

DLR-05, DLR-06

TREPOWER



- aluminum allory
- 3000K,4000K,6500K for option
- Adjustable angle
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-05-1L	12W	L88*W88*H42mm	D75mm	24°	65lm/w	>0.9
DLR-05-2L	24W	L178*W89*H42mm	L160*W75mm	24°	65lm/w	>0.9
DLR-05-3L	36W	L267*W89*H42mm	L255*W75mm	24°	65lm/w	>0.9



- aluminum allory
- 3000K,4000K,6500K for option
- Adjustable angle
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-06-1L	10W	D86*H68mm	D75mm	36°	65lm/w	>0.9
DLR-06-2L	20W	L159*W87*H68mm	L145*W75mm	36°	65lm/w	>0.9
DLR-06-3L	30W	L230*W87*H68mm	L220*W75mm	36°	65lm/w	>0.9

Recessed LED Down Light

DLR-07, DLR-08

TREPOWER



- aluminum alloy
- 3000K,4000K,6500K for option
- Anti Glare
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-07	5W	Ø60*66mm	50mm	15°/24°/36°	80lm/w	>0.9
	7W	Ø83*81mm	75mm	15°/24°/36°	80lm/w	>0.9
	12W	Ø100*105mm	90mm	15°/24°/36°	80lm/w	>0.9
	20W	Ø130*116mm	116mm	15°/24°/36°	80lm/w	>0.9
	30W	Ø160*125mm	145mm	15°/24°/36°	80lm/w	>0.9



- aluminum alloy
- 3000K,4000K,6500K for option
- external isolated driver
- BridgeLux
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-08	7W	Ø90*H60mm	75-80mm	45°	80lm/w	>0.9
	12W	Ø120*65mm	95-100mm	45°	80lm/w	>0.9
	20W	Ø150*75mm	125-130mm	45°	80lm/w	>0.9
	35W	Ø200*95mm	180-185mm	45°	80lm/w	>0.9
	50W	Ø230*110mm	210-225mm	45°	80lm/w	>0.9

Recessed LED Down Light DLR-09, DLR-10

TREPOWER



- aluminum alloy
- 3CCT by dip-switch
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-09	10W	Ø120*25mm	95mm	36°	80lm/w	>0.5
	20W	Ø170*27mm	145mm	36°	80lm/w	>0.5
	30W	Ø225*28mm	200mm	36°	80lm/w	>0.5



- aluminum alloy
- 3000K,4000K,6500K for option
- Anti Glare
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	Ra
DLR-10	7W	Ø79*36mm	Ø65-70mm	90°	80lm/w	>80
	10W	Ø93*45mm	Ø78-85mm	90°	80lm/w	>80
	12W	Ø112*52mm	Ø90-100mm	90°	80lm/w	>80
	15W	Ø135*60mm	Ø115-125mm	90°	80lm/w	>80
	20W	Ø162*72mm	Ø135-145mm	90°	80lm/w	>80
	25W	Ø192*83mm	Ø165-180mm	90°	80lm/w	>80
	30W	Ø225*97mm	Ø195-210mm	90°	80lm/w	>80
	35W	Ø225*97mm	Ø195-210mm	90°	80lm/w	>80

Recessed LED Down Light

DLR-11, DLR-12

TREPOWER



- aluminum alloy
- IP65 waterproof
- 3000K,4000K,6500K for option
- external isolated driver
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-11	10W	Ø87*72mm	Ø72mm	45°	80lm/w	>0.9
	12W	Ø110*82mm	Ø95mm	45°	80lm/w	>0.9
	15W	Ø110*82mm	Ø95mm	45°	80lm/w	>0.9
	24W	Ø138*100mm	Ø123mm	45°	80lm/w	>0.9
	30W	Ø157*110mm	Ø142mm	45°	80lm/w	>0.9
	35W	Ø183*125mm	Ø168mm	45°	80lm/w	>0.9



- aluminum alloy
- 3000K,4000K,6500K for option
- external isolated driver
- BridgeLux
- non-flicker

Model NO.	Power	Size	Cutting hole	Beam angle	Efficiency	PF
DLR-12	5W	Ø85*H50	Ø75mm	120°	80lm/w	>0.9
	7W	Ø95*H50	Ø85mm	120°	80lm/w	>0.9
	10W	Ø102*H56	Ø90mm	120°	80lm/w	>0.9
	15W	Ø124*H56	Ø110-115mm	120°	80lm/w	>0.9

Surfaced LED Down Light

DLS-01R, DLS-01S

TREPOWER



- surfaced mounted
- 3000K,4000K,6500K for option
- Housing Color: white/black
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLS-01R	7W	Φ55*120mm	COB	24°/36°	100lm/w	>90
	10W	Φ75*150mm	COB	24°/36°	100lm/w	>90
	12W	Φ75*150mm	COB	24°/36°	100lm/w	>90
	15W	Φ95*150mm	COB	24°/36°	100lm/w	>90
	20W	Φ115*160mm	COB	24°/36°	100lm/w	>90



- surfaced mounted
- 3000K,4000K,6500K for option
- Housing Color: white/black
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLS-01S	7W	55*55*80mm	COB	24°/36°	100lm/w	>90
	10W	75*75*95mm	COB	24°/36°	100lm/w	>90
	12W	75*75*130mm	COB	24°/36°	100lm/w	>90
	15W	95*95*140mm	COB	24°/36°	100lm/w	>90
	20W	115*115*160mm	COB	24°/36°	100lm/w	>90

Surfaced LED Down Light

DLS-02, DLS-03

TREPOWER



- surfaced mounted
- 3000K,4000K,6500K for option
- Housing color: white/black
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLS-02	10W	Φ75*130mm	COB	36°	100lm/w	>90
	12W	Φ75*130mm	COB	36°	100lm/w	>90
	15W	Φ95*140mm	COB	36°	100lm/w	>90
	20W	Φ115*140mm	COB	36°	100lm/w	>90
	30W	Φ140*150mm	COB	36°	100lm/w	>90



- aluminum allory
- 3000K,4000K,6500K for option
- external isolated driver
- BridgeLux COB
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLS-03	10W	Ø75*150mm	COB	24°/36°	100lm/w	>80
	15W	Ø95*150mm	COB	24°/36°	100lm/w	>80
	20W	Ø115*160mm	COB	24°/36°	100lm/w	>80

Surfaced LED Down Light

DLS-04, DLS-05

TREPOWER



- surfaced mounted
- 3000K,4000K,6500K for option
- Adjustable angle
- Housing color: white/black
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLS-04	10W	Φ60*160mm	COB	15°/24°	100lm/w	>80
	15W	Φ75*170mm	COB	15°/24°	100lm/w	>80
	18W	Φ75*170mm	COB	15°/24°	100lm/w	>80
	24W	Φ90*180mm	COB	15°/24°	100lm/w	>80



- surfaced mounted
- 3000K,4000K,6500K for option
- 360° rotatable
- Housing color: white/black
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLS-05	7W	Φ55*H130mm	COB	24°/36°	100lm/w	>80
	12W	Φ65*H150mm	COB	24°/36°	100lm/w	>80

Surfaced LED Down Light

DLS-06, DLS-07

TREPOWER



- surfaced mounted
- 3000K,4000K,6500K for option
- Adjustable angle
- Housing color: white/black
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLS-06	12W	Φ72*108mm	COB	15°/24°	100lm/w	>80
	15W	Φ92*130mm	COB	15°/24°	100lm/w	>80
	20W	Φ92*130mm	COB	15°/24°	100lm/w	>80



- surfaced mounted
- 3000K,4000K,6500K for option
- Adjustable angle
- Housing color: white/black
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLS-07	10W	Φ105*95mm	COB	90°	100lm/w	>90
	15W	Φ138*95mm	COB	90°	100lm/w	>90
	20W	Φ160*105mm	COB	90°	100lm/w	>90
	24W	Φ180*110mm	COB	90°	100lm/w	>90
	30W	Φ220*120mm	COB	90°	100lm/w	>90

Track Light DLT01, DLT02

TREPOWER



- aluminum allory
- 3000K,4000K,6500K for option
- Adjustable angle
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLT-01	10W	Φ50x100mm	BridgeLux	15°/24°/36°	80lm/w	>90
	15W	Φ60*135mm	BridgeLux	15°/24°/36°	80lm/w	>90
	20W	Φ60*135mm	BridgeLux	15°/24°/36°	80lm/w	>90
	25W	Φ80x145mm	BridgeLux	15°/24°/36°	80lm/w	>90
	30W	Φ80x150mm	BridgeLux	15°/24°/36°	80lm/w	>90
	35W	Φ90x160mm	BridgeLux	15°/24°/36°	80lm/w	>90



- aluminum allory
- 3000K,4000K,6500K for option
- Adjustable angle
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLT-02	20W	Φ90*90mm	BridgeLux	24°/36°	80lm/w	>90
	30W	Φ100*100mm	BridgeLux	24°/36°	80lm/w	>90
	40W	Φ110*106mm	BridgeLux	24°/36°	80lm/w	>90

Track Light DLT03, DLT04

TREPOWER



- aluminum allory
- 3000K,4000K,6500K for option
- Adjustable angle
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLT-03	10W	58*66*100mm+T100mm	BridgeLux	15°/24°/36°	100lm/w	>90
	20W	73*80*138mm+T123mm	BridgeLux	15°/24°/36°	100lm/w	>90
	30W	93*100mm+T144mm	BridgeLux	15°/24°/36°	100lm/w	>90



- aluminum allory
- 3000K,4000K,6500K for option
- Adjustable angle
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLT-04	15W	Φ58*155mm	BridgeLux	10°-60° adjustable	100lm/w	>90
	20W	Φ58*155mm	BridgeLux	10°-60° adjustable	100lm/w	>90
	25W	Φ58*155mm	BridgeLux	10°-60° adjustable	100lm/w	>90
	30W	Φ58*155mm	BridgeLux	10°-60° adjustable	100lm/w	>90

Track Light DLT05, DLT06

TREPOWER



- aluminum allory
- 3000K,4000K,6500K for option
- Adjustable angle
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLT-05	10W	L120*W55*45mm	BridgeLux	50°	100lm/w	>90
	15W	L120*W55*45mm	BridgeLux	50°	100lm/w	>90
	25W	L120*W55*45mm	BridgeLux	50°	100lm/w	>90



- aluminum allory
- 3000K,4000K,6500K for option
- Adjustable angle
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLT-06	20-25-30w adjustable	Φ60*135mm	BridgeLux	10°-55° adjustable	100lm/w	>90

Track Light DLT07, DMT-01

TREPOWER



- aluminum alloy
- 3000K,4000K,6500K for option
- Adjustable angle
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DLT-07	24W	Φ130*30mm	SDM2835	120°	100lm/w	>90



- aluminum alloy
- 3000K,4000K,6500K for option
- non-flicker

Model NO.	Power	Size	LEDs	Beam angle	Efficiency	Ra
DMT-01-60	20W	600x70.5x60mm	SDM2835	30°/60°/90°	140lm/w	>90
DMT-01-120	40W	1144x70.5x60mm	SDM2835	30°/60°/90°	140lm/w	>90



LED BATTEN LIGHT

LED Batten Light BT-M1



IP 40



180°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Aluminum housing
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
BT-M1-060	18W	AC220-240V	600x76x25mm	1800LM	80	>0.9	3years
BT-M1-120	36W	AC220-240V	1200x76x25mm	3600LM	80	>0.9	3years
BT-M1-150	45W	AC220-240V	1500x76x25mm	4500LM	80	>0.9	3years

LED Batten Light BT-M1- CTT



IP 40



180°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Aluminum housing
- CCT changeable
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
BT-M1-060-CCT	18W	AC220-240V	600x76x25mm	1800LM	80	>0.9	3years
BT-M1-120-CCT	36W	AC220-240V	1200x76x25mm	3600LM	80	>0.9	3years
BT-M1-150-CCT	45W	AC220-240V	1500x76x25mm	4500LM	80	>0.9	3years

LED Batten Light BT-M2



IP 40



180°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Aluminum housing
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
BT-M2-060	18W	AC220-240V	600x76x25mm	1800LM	80	>0.9	3years
BT-M2-120	36W	AC220-240V	1200x76x25mm	3600LM	80	>0.9	3years
BT-M2-150	45W	AC220-240V	1500x76x25mm	4500LM	80	>0.9	3years

LED Batten Light

BT-M3



IP 40



180°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Aluminum housing
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
BT-M3-060	24W	AC220-240V	600x76x25mm	2400LM	80	>0.5	3years
BT-M3-120	48W	AC220-240V	1200x76x25mm	4800LM	80	>0.5	3years

LED Batten Light

BT-M4



IP 40



180°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Aluminum housing
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
BT-M4-060	24W	AC220-240V	600x76x25mm	2400LM	80	>0.5	3years
BT-M4-120	48W	AC220-240V	1200x76x25mm	4800LM	80	>0.5	3years

LED Batten Light

BL40-P1



IP 40



180°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Plastic housing
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
BL40-P1-060	18W	AC220-240V	600x76x25mm	1800LM	80	>0.9	3years
BL40-P1-120	36W	AC220-240V	1200x76x25mm	3600LM	80	>0.9	3years
BL40-P1-150	45W	AC220-240V	1500x76x25mm	4500LM	80	>0.9	3years

LED Batten Light

BL40-P1-CCT



IP 40



180°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Plastic housing
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
BL40-P1-060-CCT	18W	AC220-240V	600x76x25mm	1800LM	80	>0.9	3years
BL40-P1-120-CCT	36W	AC220-240V	1200x76x25mm	3600LM	80	>0.9	3years
BL40-P1-150-CCT	45W	AC220-240V	1500x76x25mm	4500LM	80	>0.9	3years

IP65 LED Batten Light BL65-P1

TREPOWER



IP 65



180°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- PC housing
- IP65 waterproof
- 3000K,4000K,6000K for option
- Microwave sensor for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
BL65-P1-060	18W	AC220-240V	600x76x25mm	1800LM	80	>0.9	3years
BL65-P1-090	30W	AC220-240V	900x76x25mm	3000LM	80	>0.9	3years
BL65-P1-120	36W	AC220-240V	1200x76x25mm	3600LM	80	>0.9	3years
BL65-P1-150	50W	AC220-240V	1500x76x25mm	5000LM	80	>0.9	3years
BL65-P1-150-1	60W	AC220-240V	1500x76x25mm	6000LM	80	>0.9	3years

Triproof Lighting Fixture BTR65-ES

TREPOWER



- IP65 Waterproof
- PC Housing material
- PC Cover material
- Metal mounting kit
- Housing color: gray

Model NO.	Size (L*W*H:mm)	For tube	Wire input	Warranty
BTR65-ES-60	660*67*77	1* T8-60cm	one end	3years
BTR65-ES-120	1262*67*77	1* T8-120cm	one end	3years
BTR65-ES-150	1562*67*77	1* T8-150cm	one end	3years

Triproof Lighting Fixture BTR65-ED

TREPOWER



- IP65 Waterproof
- PC Housing material
- PC Cover material
- Metal mounting kit
- Housing color: gray

Model NO.	Size (L*W*H:mm)	For tube	Wire input	Warranty
BTR65-ED-60	660*100*82	2* T8-60cm	one end	3years
BTR65-ED-120	1262*100*82	2* T8-120cm	one end	3years
BTR65-ED-150	1562*100*82	2* T8-150cm	one end	3years



LED CEILING LIGHT

Super-slim Ceiling Light CP25, ABS housing



IP 44



120°



CRI>80



Non-Dimmable



Warranty



No Flicker



50000h



≥15000

- ABS housing
- CCT changed by switch built-in
- Microwave sensor for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CP25-023	24W	AC220-240V	Φ230*23mm	2400LM	80	>0.9	3years
CP25-030	30W	AC220-240V	Φ300*23mm	3000LM	80	>0.9	3years
CP25-040	40W	AC220-240V	Φ400*23mm	4000LM	80	>0.9	3years
CP25-050	50W	AC220-240V	Φ500*23mm	5000LM	80	>0.9	3years
CP25-060	60W	AC220-240V	Φ600*23mm	6000LM	80	>0.9	3years

Nodic Design Ceiling Light CM50, Metal

TREPOWER



IP 20



120°



CRI>80



Non-Dimmable



Warranty



No Flicker



50000h



≥15000

- Housing material: Steel
- Housing color:white/black
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CM50R-030	30W	AC220-240V	Ø300xH50mm	3000LM	80	>0.5	3years
CM50R-040	40W	AC220-240V	Ø400xH50mm	4000LM	80	>0.5	3years
CM50R-050	50W	AC220-240V	Ø500xH50mm	5000LM	80	>0.5	3years
CM50R-060	60W	AC220-240V	Ø600xH50mm	6000LM	80	>0.5	3years
CM50S-030	30W	AC220-240V	300*300xH50mm	3000LM	80	>0.5	3years
CM50S-040	40W	AC220-240V	400*400xH50mm	4000LM	80	>0.5	3years
CM50S-050	50W	AC220-240V	500*500xH50mm	5000LM	80	>0.5	3years
CM50S-060	60W	AC220-240V	600*600xH50mm	6000LM	80	>0.5	3years
CM50S-064	60W	AC220-240V	400*600xH50mm	6000LM	80	>0.5	3years
CM50S-096	100W	AC220-240V	600*900xH50mm	10000LM	80	>0.5	3years

Nodic Design Ceiling Light

CM50-DIM, Metal, 2.4G Bluetooth

Remote control



IP 20



120°



CRI>80



Dimmable



Warranty



No Flicker



50000h



≥15000

- Dimmable+CCT
- Can be controlled by remote
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CM50R-030-DIM	30W	AC220-240V	Ø300xH50mm	3000LM	80	>0.5	3years
CM50R-040-DIM	40W	AC220-240V	Ø400xH50mm	4000LM	80	>0.5	3years
CM50R-050-DIM	50W	AC220-240V	Ø500xH50mm	5000LM	80	>0.5	3years
CM50R-060-DIM	60W	AC220-240V	Ø600xH50mm	6000LM	80	>0.5	3years
CM50S-030-DIM	30W	AC220-240V	300*300xH50mm	3000LM	80	>0.5	3years
CM50S-040-DIM	40W	AC220-240V	400*400xH50mm	4000LM	80	>0.5	3years
CM50S-050-DIM	50W	AC220-240V	500*500xH50mm	5000LM	80	>0.5	3years
CM50S-060-DIM	60W	AC220-240V	600*600xH50mm	6000LM	80	>0.5	3years
CM50S-064-DIM	60W	AC220-240V	400*600xH50mm	6000LM	80	>0.5	3years
CU50S-096-DIM	100W	AC220-240V	600*900xH50mm	10000LM	80	>0.5	3years

Nodic Design Ceiling Light CM50-HW, Metal+Wood

TREPOWER



IP 20



120°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Housing material: Steel
- Housing color:white/black
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CM50-HW-030	30W	AC220-240V	Ø300xH50mm	3000LM	80	>0.5	3years
CM50-HW-040	40W	AC220-240V	Ø400xH50mm	4000LM	80	>0.5	3years
CM50-HW-050	50W	AC220-240V	Ø500xH50mm	5000LM	80	>0.5	3years
CM50-HW-060	60W	AC220-240V	Ø600xH50mm	6000LM	80	>0.5	3years

Nodic Design Ceiling Light

CM50-HW-DIM, Metal+Wood

2.4G Bluetooth Remote control

TREPOWER



IP 20



120°



CRI>80



Dimmable



Warranty



No Flicker



50000h



≥15000

- Dimmable+CCT
- Can be controlled by remote
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CM50-HW-030-DIM	30W	AC220-240V	Ø300xH50mm	3000LM	80	>0.5	3years
CM50-HW-040-DIM	40W	AC220-240V	Ø400xH50mm	4000LM	80	>0.5	3years
CM50-HW-050-DIM	50W	AC220-240V	Ø500xH50mm	5000LM	80	>0.5	3years
CM50-HW-060-DIM	60W	AC220-240V	Ø600xH50mm	6000LM	80	>0.5	3years

IP44 Ceiling Light CL-60, Metal



IP 40/44



120°



CRI>80



Non-Dimmable



Warranty



No Flicker



50000h



≥15000

- 3000K,4000K,6000K for option
- IP44,IP40 for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CL60-023	11W	220-240v AC	Ø230xH60mm	1200LM	80	>0.9	3years
CL60-030	18W	220-240v AC	Ø300xH60mm	1800LM	80	>0.9	3years
CL60-036	24W	220-240v AC	Ø350xH60mm	2400LM	80	>0.9	3years
CL60-040	50W	220-240v AC	Ø400xH60mm	4500LM	80	>0.9	3years
CL60-060	80W	220-240v AC	Ø600xH60mm	6400LM	80	>0.9	3years
CL60-080	100W	220-240v AC	Ø800xH60mm	8000LM	80	>0.9	3years

IP44 Ceiling Light

CL-60-MW, Metal, Microwave sensor

TREPOWER



IP 40/44



120°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h




≥15000

- 3000K,4000K,6000K for option
- Microwave sensor
- IP44,IP40 for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CL60-023-MW	11W	220-240v AC	Ø230xH60mm	1200LM	80	>0.9	3years
CL60-030-MW	18W	220-240v AC	Ø300xH60mm	1800LM	80	>0.9	3years
CL60-036-MW	24W	220-240v AC	Ø350xH60mm	2400LM	80	>0.9	3years

Frameless Ceiling Light CL-80, Metal+PC

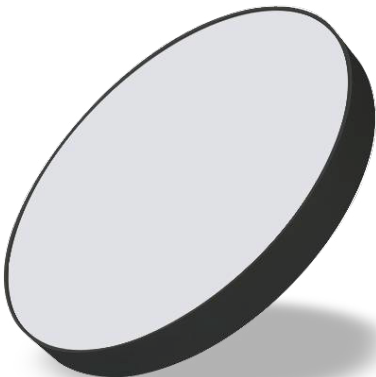

IP 40



120°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- Steel housing+PC cover
- 3000K/4000K/6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CL80-030	18W	AC220-240V	Φ300 * H80mm	3000LM	80	>0.9	3years
CL80-040	36W	AC220-240V	Φ400 * H80mm	4000LM	80	>0.9	3years
CL80-050	48W	AC220-240V	Φ500 * H80mm	5000LM	80	>0.9	3years
CL80-068	60W	AC220-240V	Φ680 * H80mm	7000LM	80	>0.9	3years

Ceiling Light CU80, Metal+PC



IP 40



120°



CRI>80



Dimmable



Warranty



No Flicker



50000h



≥15000

- Black/White+wooden pattern
- Dimmable+CCT
- Can be controlled by remote
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CU80-030	18W	AC220-240V	Ø300x80mm	1800LM	80	>0.5	3years
CU80-040	24W	AC220-240V	Ø400x80mm	2400LM	80	>0.5	3years
CU80-050	36W	AC220-240V	Ø500x80mm	3600LM	80	>0.5	3years
CU80-060	50W	AC220-240V	Ø600x80mm	5000LM	80	>0.5	3years

Ceiling Light CU90, Metal

TREPOWER



IP 40



120°



CRI>80



Dimmable



Warranty



No Flicker



50000h



≥15000

- Housing material: Steel
- Housing color:white/black
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CU90R-030	30W	AC220-240V	Ø300xH60+30mm	3000LM	80	>0.5	3years
CU90R-040	40W	AC220-240V	Ø380xH60+30mm	4000LM	80	>0.5	3years
CU90R-050	50W	AC220-240V	Ø480xH60+30mm	5000LM	80	>0.5	3years
CU90R-060	60W	AC220-240V	Ø600xH60+30mm	6000LM	80	>0.5	3years
CU90S-030	30W	AC220-240V	300*300*90mm	3000LM	80	>0.5	3years
CU90S-040	40W	AC220-240V	400*400*90mm	4000LM	80	>0.5	3years
CU90S-050	50W	AC220-240V	500*500*90mm	5000LM	80	>0.5	3years
CU90S-060	60W	AC220-240V	600*600*90mm	6000LM	80	>0.5	3years

Ceiling Light

CU90-DIM, Metal

2.4G Bluetooth Remote control



IP 40



120°



CRI>80



Dimmable



Warranty



No Flicker



50000h



≥15000

- Dimmable+CCT
- Can be controlled by remote
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Lumen	Ra	PF	Warranty
CU90R-030-DIM	30W	AC220-240V	Ø300xH60+30mm	3000LM	80	>0.5	3years
CU90R-040-DIM	40W	AC220-240V	Ø380xH60+30mm	4000LM	80	>0.5	3years
CU90R-050-DIM	50W	AC220-240V	Ø480xH60+30mm	5000LM	80	>0.5	3years
CU90R-060-DIM	60W	AC220-240V	Ø600xH60+30mm	6000LM	80	>0.5	3years

IP65 Ceiling Light
CW90, ABS, with microwave sensor

TREPOWER



IP 65

120°



CRI>80



Non-Dimmble



Warranty



No Flicker



50000h



≥15000

- IP65 Waterproof
- Microwave sensor(6-8m)
- Emergency functional(≥3h)
- 3000K,4000K,6000K for option
- High light efficiency
- Energy saving

Model NO.	Power	Input	Size	Ra	PF	Warranty
CW90-E01-9	9W	200-240vAC	Ø230*H90	80/90	>0.9	3years
CW90-E01-18	18W	200-240vAC	Ø280*H90	80/90	>0.9	3years



JIAXING TREPOWER CO.,LTD.

Head office: A1401-2,zhonghuan plaza,nanhu,jiaxing,zhejiang

Tel: +86 (573) 828 06036 E-mail: info@trepower.com.cn

www.trepower.com.cn